

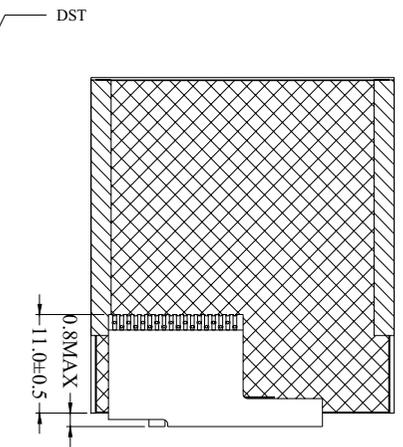
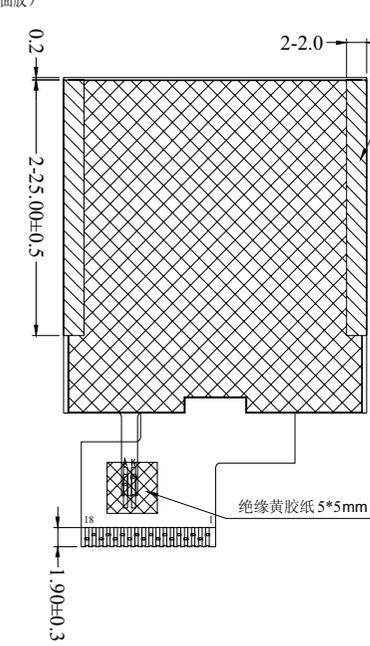
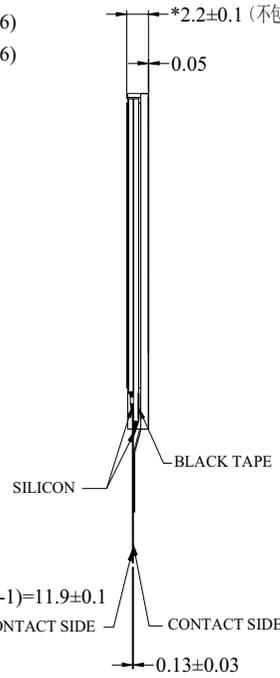


PIN ASSIGNMENT


PIN	SYMBOL
1	GND
2	VDD
3	/CS
4	/RESET
5	/RS
6	/WR
7	/RD
8	DB7
9	DB6
10	DB5
11	DB4
12	DB3
13	DB2
14	DB1
15	DB0
16	GND
17	LED_K
18	LED_A

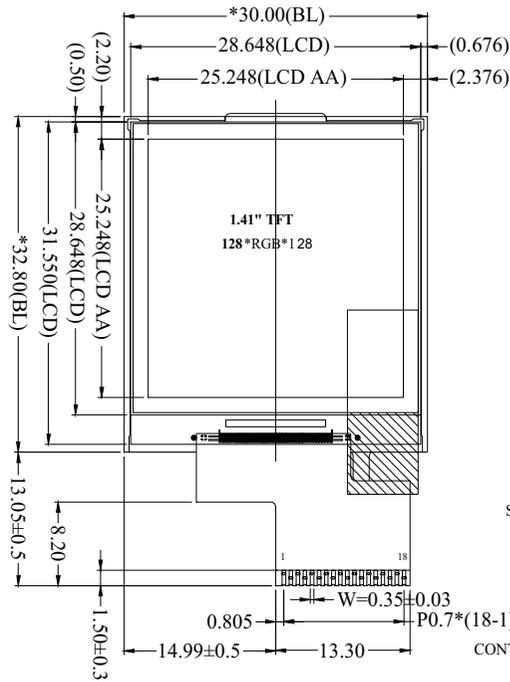

弯折参考图
展开出货



Pixel Scale 50:1



BACKLIGHT LED CIRCUIT

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: VDD=3.0V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ST7735S.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: WHITE LED, If=30mA, Vf=2.9~3.4V.
8. GENERAL TOLERANCE: ±0.2.
9. RoHS COMPLIANT.

		CUSTOMER APVL		DATE	2014/06/07
		DRAWN	SCALE : FIT	TITLE	
		DFTG CHK	UNIT	MI0140AT-1	
		ENGR CHK	mm	MODEL	
		APPROVAL			
01	FIRST ISSUE	2014.06.07	MULTI-INNO TECHNOLOGY CO.,LTD.		
VER.	CONTENT	DATE	DWG NO	01	PAGE 1/1