



上偏光片光面




DOTS DETAIL SCALE 100:1



IF=180MA, VF=9.6V (TYP)

弯折出货 (FPC松弛状态, 没有粘在下铁框上)

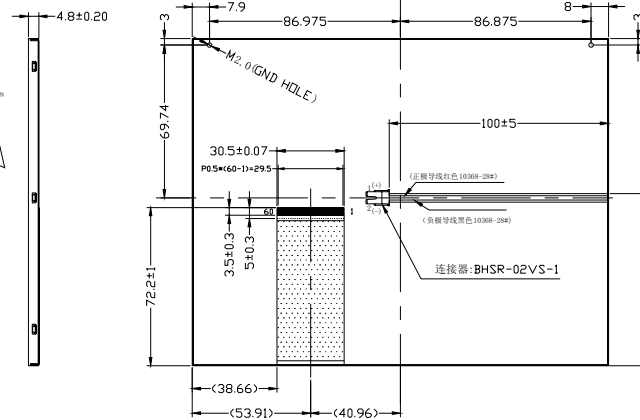

不接地电膜区域

PIN ASSIGNMENT

1	AGND	21	B1	41	VCOM
2	AVDD	22	B2	42	DITH
3	VCC	23	B3	43	NC
4	R0	24	B4	44	NC
5	R1	25	B5	45	V10
6	R2	26	B6	46	V9
7	R3	27	B7	47	V8
8	R4	28	DCLK	48	V7
9	R5	29	DE	49	V6
10	R6	30	HSD	50	V5
11	R7	31	VSD	51	V4
12	G0	32	MODE3	52	V3
13	G1	33	RSTB	53	V2
14	G2	34	STBYB	54	V1
15	G3	35	SHLR	55	NC
16	G4	36	VCC	56	VGH
17	G5	37	UPDN	57	VCC
18	G6	38	GND	58	VGL
19	G7	39	AGND	59	GND
20	B0	40	AVDD	60	NC

NOTES:

- DISPLAY MODE : 16.7M Color TFT, Transmissive, Normal White
- OPERATING TEMPERATURE: -20°C TO 70°C
- STORAGE TEMPERATURE: -30°C TO 80°C
- DRIVER IC: X-OTA7000A*2 + Y:SPFD6060A
- CORRESPONDING CONNECTOR: FH28-60S-0.5SH(HIROSE)
- 带 () 的尺寸代表参考尺寸
- LCM VA 为集成触控模组可视区域, 推荐客户机壳视窗开窗可视区域比 LCM VA 单边小 0.3mm, 并确保比 LCD AA 区单边大 0.4mm 或者以上。



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL	2014.07.16	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MI0840HT-5
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	FIRST ISSUE	2014.07.16
VER.	REVISED DESCRIPTION	DATE