
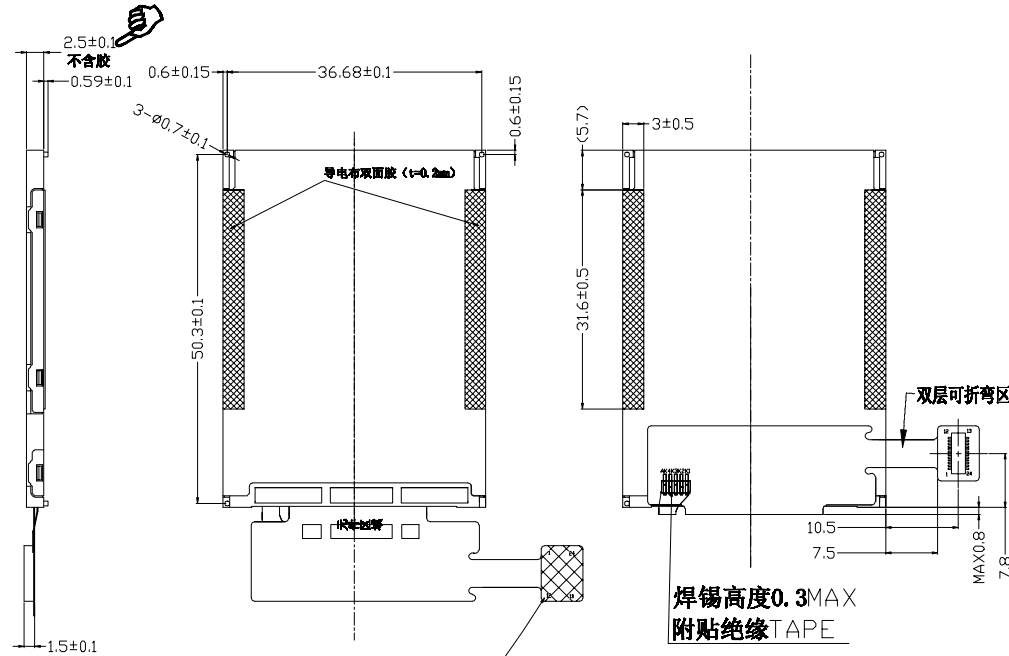


24pin BTB连接器:
LCN: BAMB4-24153-0502
补强+FPC总厚度不超过0.4;

NOTES:

1. DISPLAY TYPE: TFT,262K,TRANSMISSIVE
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ILI9341V
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 4-LED, If=60mA,Vf=3.2V.
8. UNMARKED TOLERANCE: ±0.2.
9. RoHS COMPLIANT.



补强板总厚度为: 0.3±0.03mm

FPC弯折参考示意图
展开出货

PIN DESCRIPTION

1	GND
2	NC X-(XL)
3	NC X+(XR)
4	NC Y-(YD)
5	NC Y+(YU)
6	VDD(2.8V)
7	LED-A
8	LED-K4
9	LED-K3
10	LED-K2
11	LED-K1
12	/WR
13	/RD
14	/CS
15	RESET
16	RS
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7

CUSTOMER APVL	SCALE	DATE	
DRAWN	UNIT	TITLE	
DFTG CHK	mm	MI0200WT-1	
ENGR CHK		MODEL	
APPROVAL		DWG NO	PAGE
			1/1

MULTI-INNO TECHNOLOGY CO.,LTD.