







PIN ASSIGNMENT:


PIN	SYMBOL
1	GND
2	YD
3	XL
4	YU
5	XR
6	LCD_ID
7	VCC
8	IOVCC
9	FMARK
10	CS
11	RS
12	WR
13	RD
14	DB0
15	DB1
16	DB2
17	DB3
18	DB4
19	DB5
20	DB6
21	DB7
22	DB8
23	DB9
24	DB10
25	DB11
26	DB12
27	DB13
28	DB14
29	DB15
30	RESET
31	IMO
32	NC
33	GND
34	LED-K1
35	LED-K2
36	LED-K3
37	LED-K4
38	LED-A
39	GND
40	NC

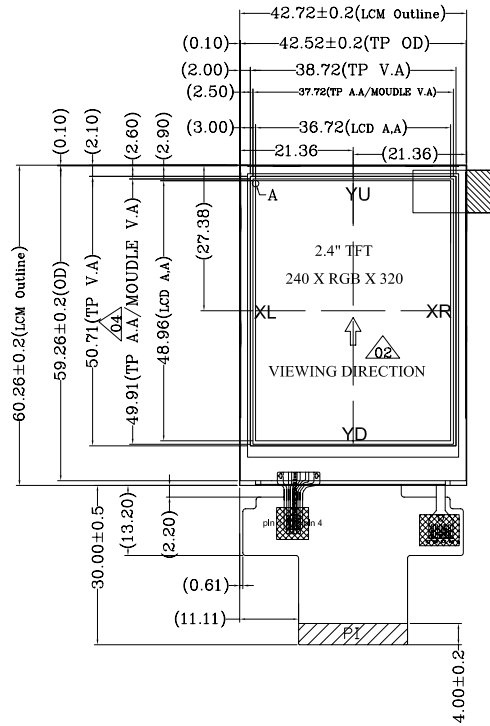


CIRCUIT DIAGRAM

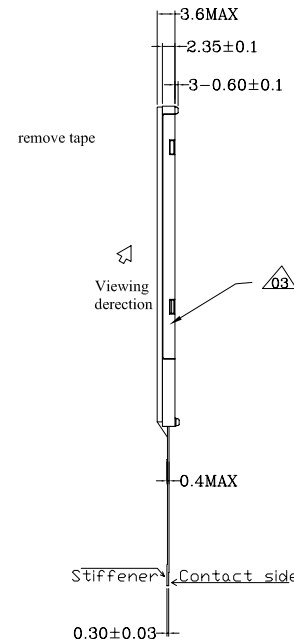

DETAIL A
SCALE: 40:1

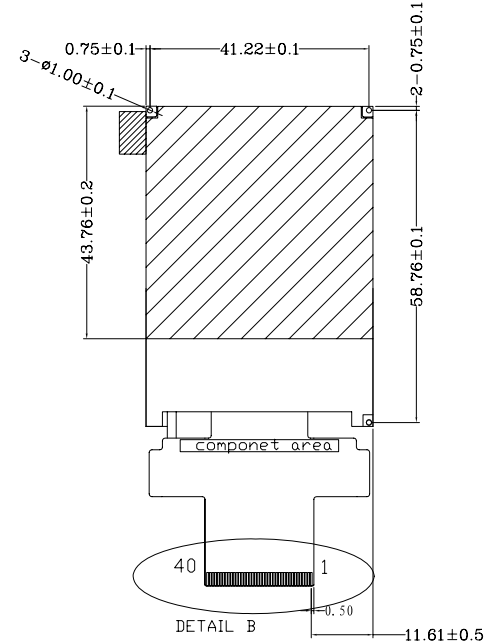

DETAIL B
SCALE: 4:1

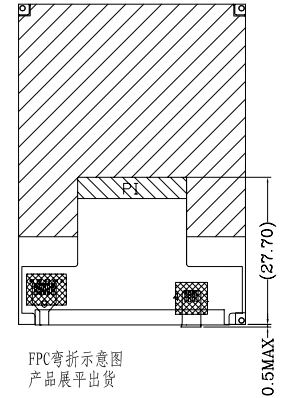

FPC弯折示意图
产品展示出货

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE
2. DRIVE METHOD: VDD=2.8V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ILI9341
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: WHITE LED, If=15mA, Vf=3.2±0.2.V.
8. GENERAL TOLERANCE: ±0.2.
9. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V.A.
10. RECOMMENDED CUSHION ADHERENT AREA: TP V.A+1.6mm.
11. CONNECT: FH19SC-40S-0.5SH.
12. RoHS COMPLIANT.

VER.	SYMBOL	SIGN	DATE	CUSTOMER APVL	SCALE	UNIT	TITLE	DATE
04	03			CHANGE T/P				2013-10-28
03	03		11.21	CHANGE BL			MI0240S1T	
02	02		8.23	CHANGE VIEWING DIRECTION		mm		
01	01		8.08	CHANGE VIEWING DIRECTION ,REMOVE DOUBLE-SIDE				
00			8.03	First issuance				
				MULTI-INNO TECHNOLOGY CO.,LTD.				