




1	LEDK
2	LEDA1
3	LEDA2
4	LEDA3
5	LEDA4
6	IMO
7	IM1
8	IM2
9	IM3
10	RESET
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDO
34	SDI
35	RD
36	WRX(D/CX)
37	D/CX(SCL)
38	CSX
39	TE
40	VDDI
41	VDDI
42	VCI
43	GND
44	X+(NC)
45	Y+(NC)
46	X-(NC)
47	Y-(NC)
48	GND
49	GND
50	GND



Detail A Scale 20:1

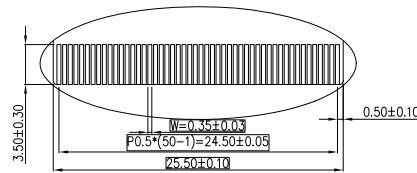

Detail B Scale 2:1



BLU circuit

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, POSITIVE.
2. OPERATING VOLTAGE: VDDI/VCI=2.8V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ILI9341.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. INTERFACE: CPU/RGB INTERFACE.
8. SURFACE LUMINANCE: 650cd/m<sup>2</sup>(TYP.).
9. LED BACKLIGHT: 4-CHIP WHITE LED, If=60mA, Vf=3.2V.
10. GENERAL TOLERANCE: ±0.2.
11. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN LCD V.A.
12. RoHS COMPLIANT.

MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	CAROL 2014.11.24	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: mm	MI0283QT-17
APPROVED BY:			DESCRIPTION:
VERSION:	01		TFT MODULE

01	FIRST ISSUE	2014.11.24	APPROVED BY:
VER.	REVISED DESCRIPTION	DATE	VERSION NO: 01