


PIN	SYMBLE
1	VBL-
2	VBL-
3	VBL+
4	VBL+
5	NC
6	NC
7	NC
8	RESET
9	CS
10	SCL
11	SDL
12	B0
13	B1
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE
  2. VOLTAGE: VCC=3.3V
  3. VIEWING DIRECTION: 6 O'CLOCK.
  4. IC DRIVER: ILI9322
  5. OPERATING TEMP: -20°C ~ 70°C.
  6. STORAGE TEMP: -30°C ~ 80°C.
  7. LED BACKLIGHT: 9-WHITE LED
  8. GENERAL TOLERANCE: ±0.2.
  9. RoHS COMPLIANT.

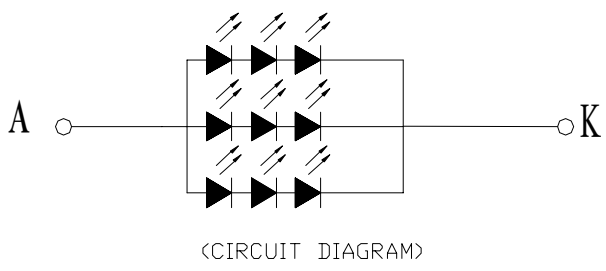

CUSTOMER APVL		DATE	
DRAWN		SCALE	TITLE
DFTG CHK		UNIT	MI0400GT-1
ENGR CHK		mm	MODEL
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1