

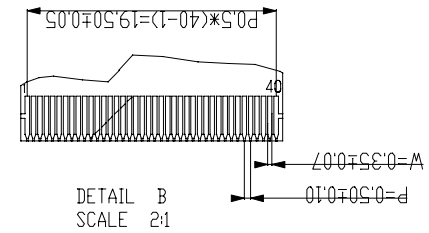
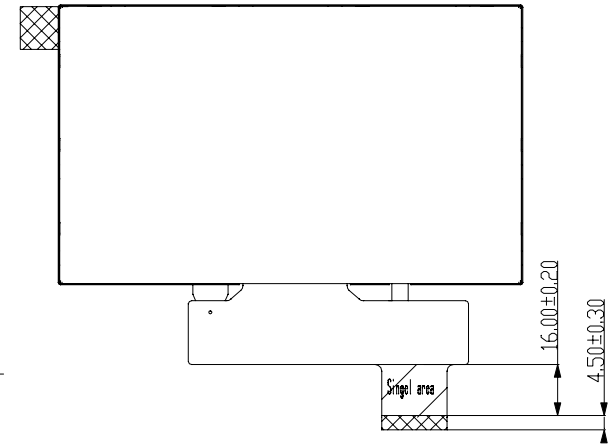


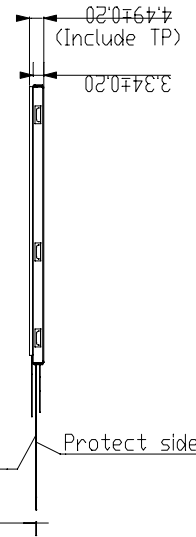

1	VLED
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	X1
38	Y1
39	X2
40	Y2

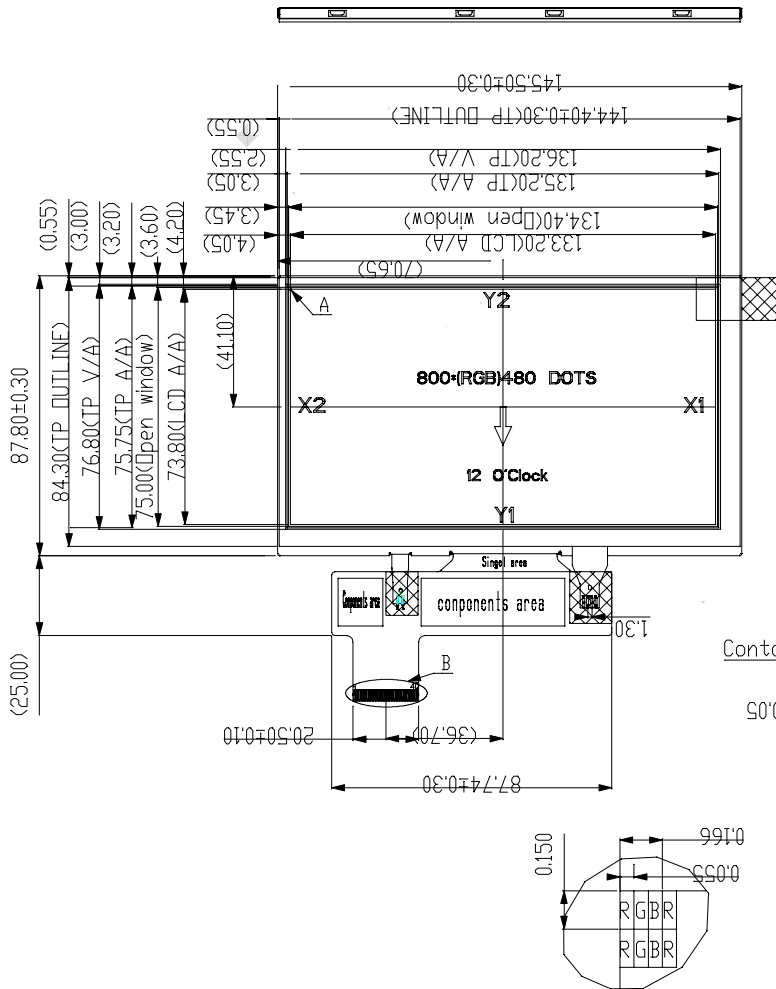

Notes:

1. Display Type: a-Si TFT Transmissive;
2. Gray Inversion: 6 O'clock;
3. IC NO: NT52001, NT39416F
4. General Tolerance: ±0.3
5. Storage Temperature: -30°C~+80°C;
6. Requirement on Environment Protection: RoHS Compliant.

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0600BT	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	
MULTI-INNO TECHNOLOGY CO.,LTD.		PAGE	
		1/1	