
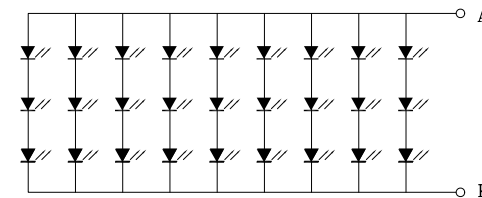


PIN DESCRIPTION

PIN NO	SYMBOL
1	VCOM
2	DVDD
3	DVDD
4	NC
5	RESET
6	STBYB
7	GND
8	NIND0
9	PIND0
10	GND
11	NIND1
12	PIND1
13	GND
14	NIND2
15	PIND2
16	GND
17	NINC
18	PINC
19	GND
20	NIND3
21	PIND3
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	SHLR
34	UPDN
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

注意：铁框开口，左边有卡偏光片的风险



LED CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
2. OPERATING VOLTAGE: VDD=3.3V.
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. OPERATING TEMP: -20°C ~ 70°C.
5. STORAGE TEMP: -30°C ~ 80°C.
6. INTERFACE: LVDS.
7. SURFACE LUMINANCE: 450cd/m<sup>2</sup>(TYP.)
8. LED BACKLIGHT: 27-CHIP WHITE LED, If=225mA, Vf=9.6V.
9. GENERAL TOLERANCE: ±0.2.
10. RoHS COMPLIANT.

		CUSTOMER APVL		DATE	2014/08/08
		DRAWN	SCALE : FIT	TITLE	
		DFTG CHK	UNIT	MI0700AHT-5	
		ENGR CHK	mm	MODEL	
		APPROVAL			
01	FIRST ISSUE	2014.08.08	MULTI-INNO TECHNOLOGY CO.,LTD.		
VER.	CONTENT	DATE	DWG NO	PAGE	
			01	1/1	