
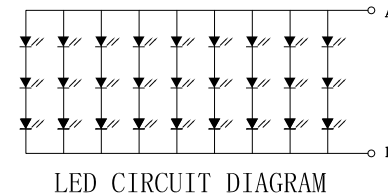
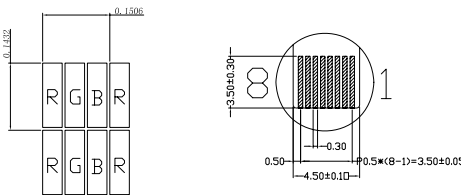


Remark:

1. The polarizer stuck on left side will get stuck due to the open metal frame.
2. CTP Cover Glass is with black ink priting

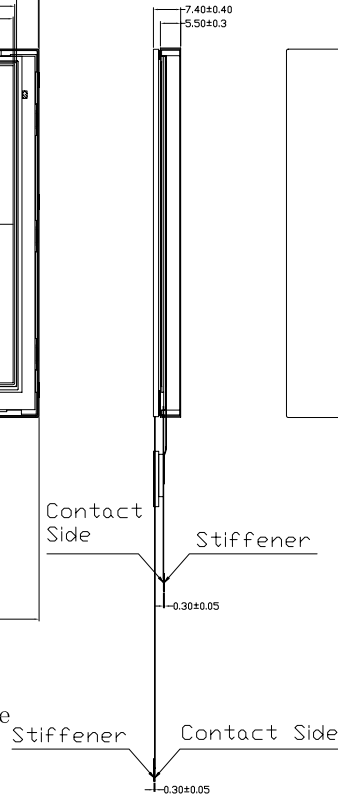

PIN DESCRIPTION

PIN NO	SYMBOL
1	VCOM
2	DVDD
3	DVDD
4	NC
5	RESET
6	STBYB
7	GND
8	NIND0
9	PIND0
10	GND
11	NIND1
12	PIND1
13	GND
14	NIND2
15	PIND2
16	GND
17	NINC
18	PINC
19	GND
20	NIND3
21	PIND3
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	SHLR
34	UPDN
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

CN1 DESCRIPTION

1	VSS
2	VDD
3	SDA
4	SCL
5	/RST
6	INT
7	WAKE
8	VSS

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
2. OPERATING VOLTAGE: VDD=3.3V.
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. CTP DRIVER IC: FT5306.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. INTERFACE: LVDS.
8. SURFACE LUMINANCE: 360cd/m<sup>2</sup>(TYP.)
9. LED BACKLIGHT: 27-CHIP WHITE LED, If=225mA, Vf=9.6V.
10. GENERAL TOLERANCE: ±0.3.
11. RoHS COMPLIANT.



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2014.11.12	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT:	MI0700AHT-7
APPROVED BY:		mm	DESCRIPTION:
VERSION NO:	01		TFT MODULE

01	FIRST ISSUE	2014.11.12
VER.	REVISED DESCRIPTION	DATE