
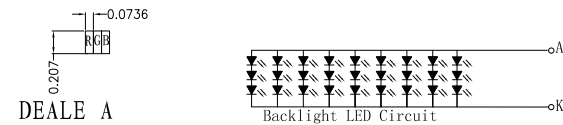


PINS ASSIGNMENTS

NO.	SYMBOL	NO.	SYMBOL
1	LED+	32	R3
2	LED+	33	R2
3	LED-	34	R1
4	LED-	35	R0
5	GND	36	GND
6	VCOM	37	DCLK
7	DVDD	38	GND
8	MODE	39	L/R
9	DE	40	U/D
10	VS	41	VGH
11	HS	42	VGL
12	B7	43	AVDD
13	B6	44	RESET
14	B5	45	NC
15	B4	46	VCOM
16	B3	47	DITHB
17	B2	48	GND
18	B1	49	NC
19	B0	50	NC
20	G7		
21	G6		
22	G5		
23	G4		
24	G3		
25	G2		
26	G1		
27	G0		
28	R7		
29	R6		
30	R5		
31	R4		

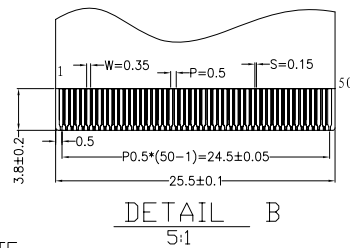

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: DVDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. IC DRIVER: NT52001+NT39419B
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 27-WHITE LED, If=180mA, Vf=9.6V.
8. GENERAL TOLERANCE: ±0.2.
9. RoHS COMPLIANT.

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0800JT-3	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	PAGE
MULTI-INNO TECHNOLOGY CO.,LTD.			1/1