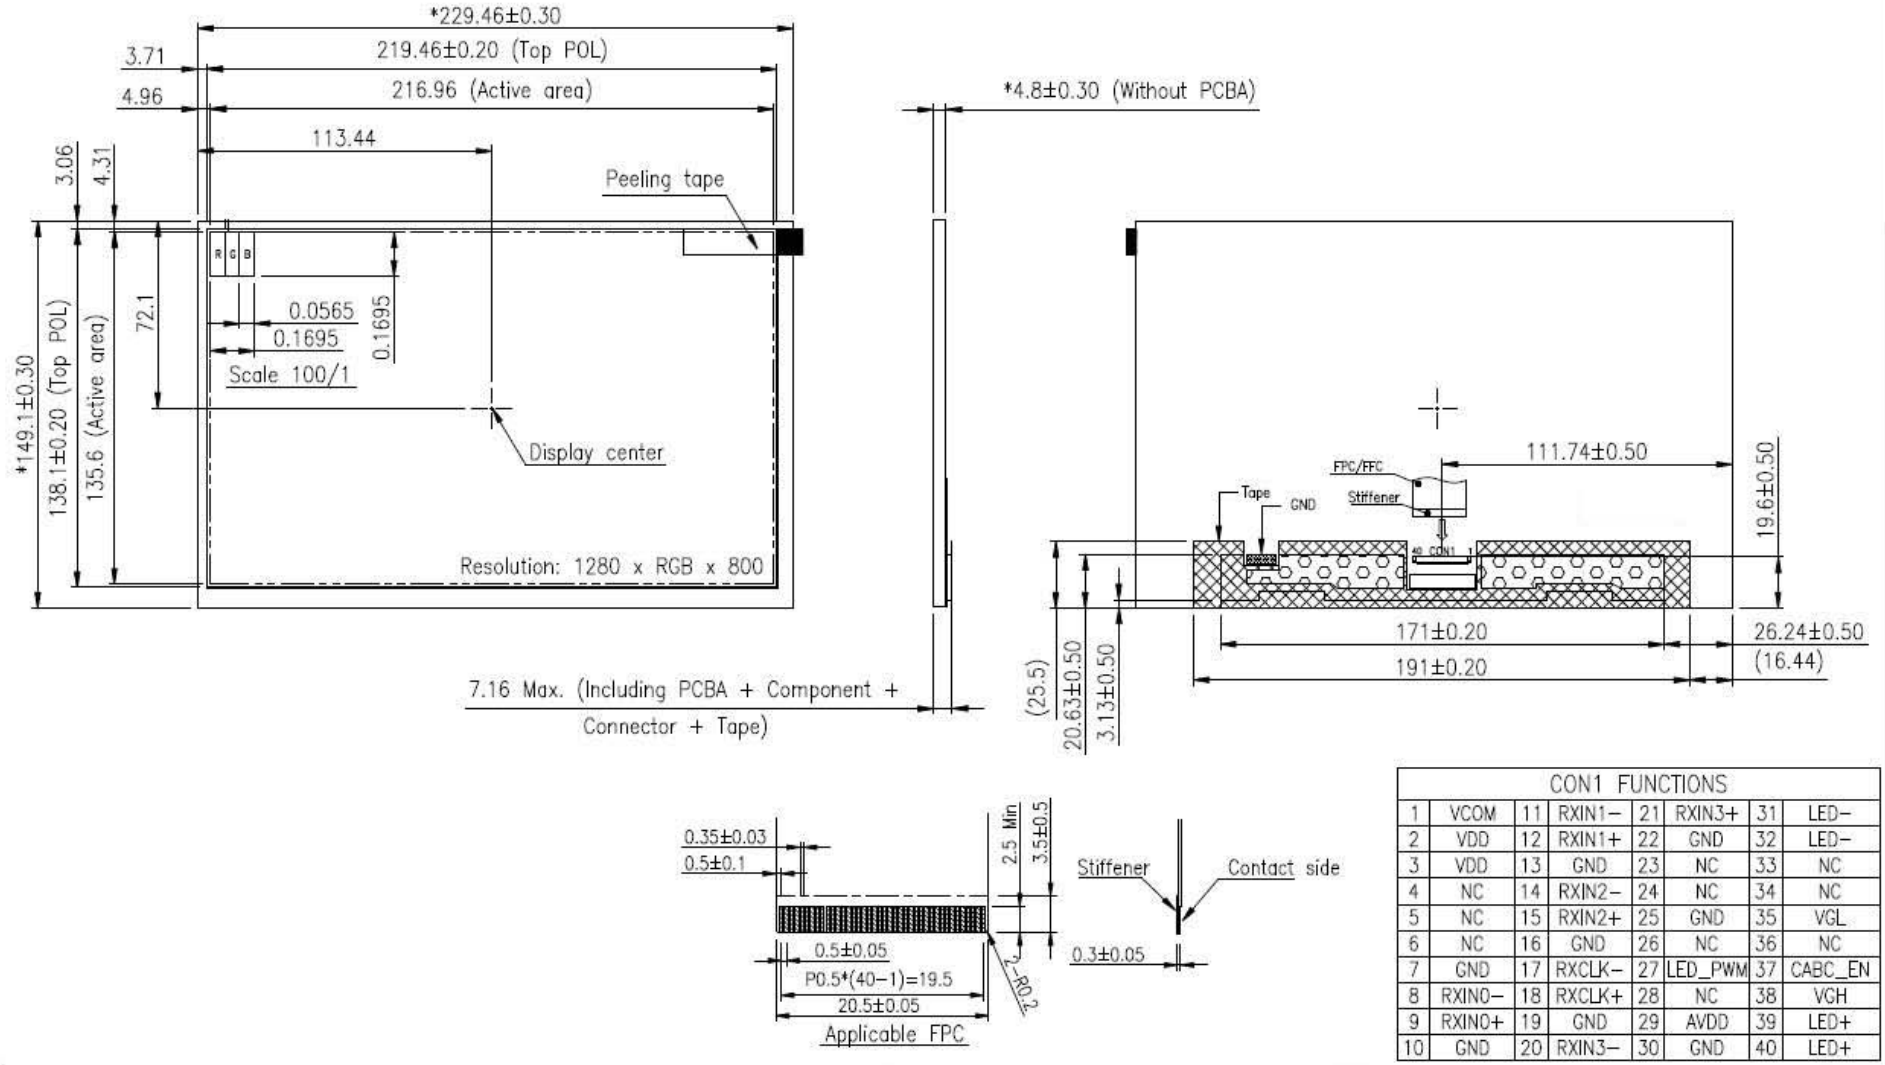

CON1 FUNCTIONS							
1	VCOM	11	RXIN1−	21	RXIN3+	31	LED−
2	VDD	12	RXIN1+	22	GND	32	LED−
3	VDD	13	GND	23	NC	33	NC
4	NC	14	RXIN2−	24	NC	34	NC
5	NC	15	RXIN2+	25	GND	35	VGL
6	NC	16	GND	26	NC	36	NC
7	GND	17	RXCLK−	27	LED_PWM	37	CABC_EN
8	RXIN0−	18	RXCLK+	28	NC	38	VGH
9	RXIN0+	19	GND	29	AVDD	39	LED+
10	GND	20	RXIN3−	30	GND	40	LED+

Note:

1. For RoHS.
2. Tolerance is ±0.3 unless otherwise noted.
3. LCM connector : Vigorconn F62240-H1210B or equivalent.
4. * is important dimension.
5. Center luminance : 500 cd/m^2 (typ)

VER.	REVISED DESCRIPTION	DATE
01	FIRST ISSUE	2014.12.09

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2014.12.09	SCALE : 1/1	MODULE P/N: MI1010UT-1
CHECKED BY:		UNIT: mm	
APPROVED BY:			DESCRIPTION: TFT MODULE
VERSION NO:	01		