


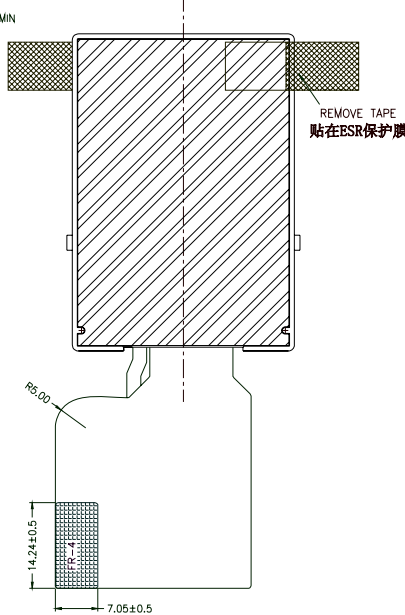



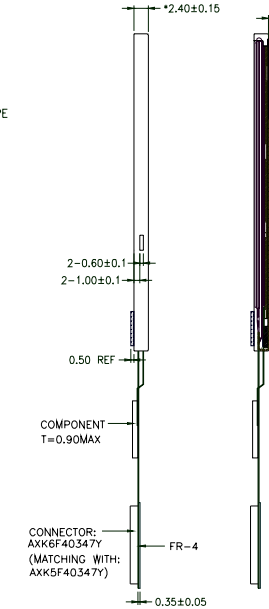

环保标准
ROHS标准
《有害物质管理标准》

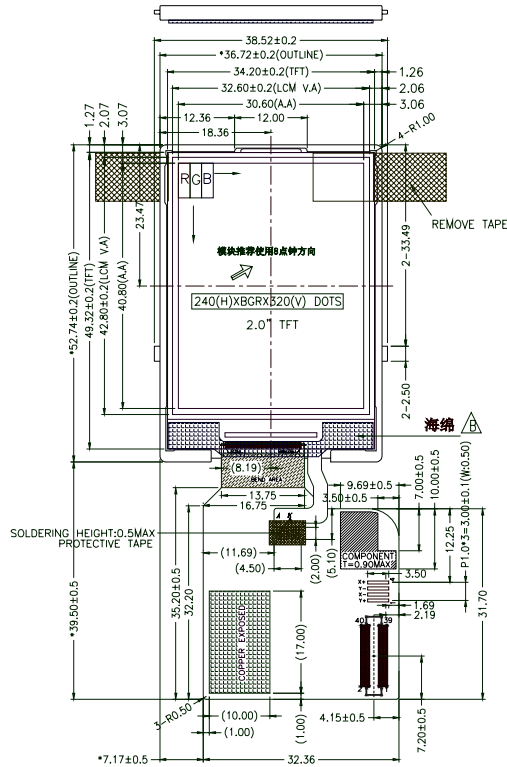

FPC DEFINE

NO.	Pin name	NO.	Pin name
1	NC(X+)	21	R2
2	NC(Y-)	22	R1
3	NC(X-)	23	R0
4	NC(Y+)	24	G5
5	GND	25	G4
6	GND	26	G3
7	LCD_VDD	27	G2
8	IOVDD	28	G1
9	GND	29	G0
10	RESET	30	B5
11	SPI_CS	31	B4
12	SPI_CLK	32	B3
13	SPI_SDA	33	B2
14	VSYNC	34	B1
15	HSYNC	35	B0
16	LCD_PCLK	36	LEDK4
17	DE	37	LEDK3
18	R5	38	LEDK2
19	R4	39	LEDK1
20	R3	40	LEDA

TP PIN DEFINE

NO.	Pin name
1	Y+
2	X-
3	Y-
4	X+

NOTES:

- LCD display type: TFT, TRANSFLECTIVE
- LCD driver: HX8347
- Operating temperature: -20° C TO 70° C
- Storage temperature: -30° C TO 80° C
- Backlight: 4-CHIP WHITE LEDS
- LCM VA is the viewing area of the module. The case window is suggested to be 0.3mm smaller than LCM VA on each side, meanwhile it should be at least 0.4mm larger than LCD AA on each side.
- () MEANS: DIMENSION FOR REFERENCE , * MEANS CRITICAL DIMENSION.

CUSTOMER APVL		DATE	
DRAWN	SCALE: X.X ±0.3 X.XX ±0.2 ANGULAR: ±1/4°	TITLE	MI0200VT-1
DFTG CHK	UNIT: mm	MODEL	
ENGR CHK	APPROVAL	DWG NO	PAGE 1/1
MULTI-INNO TECHNOLOGY CO.,LTD.			