


Pin	Symbol
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	BS
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	ES
22	G1
23	G2
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GAD
33	R2
34	R1
35	R0
36	GND
37	GND
38	DC1K
39	GND
40	GND


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. DRIVER IC: HX8262+HX8678.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. SURFACE LUMINANCE: 1000cd/m<sup>2</sup>(TYP).
8. LED BACKLIGHT: 15-CHIP WHITE LED, If=260mA.
9. UPPER POLARIZER TYPE: GLARE.
10. GENERAL TOLERANCE: ±0.3mm.
11. RoHS COMPLIANT.



Backlight circuit  
(3\*5=15LED, 260mA)

CONNECTOR MATED FPC/FPC STYLE  
(SCALE 2:1)

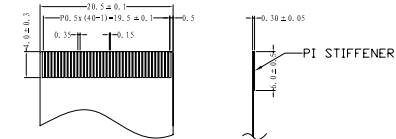

MULTI-INNO TECHNOLOGY CO.,LTD.

04	Modify connector type	2015.04.16	DRAWN BY: CAROL 2015.04.16	SCALE : 1/1	MODULE P/N: MI0700AJT-5
03	Change the upper polarizer to be glare type.	2015.03.31			
02	Change backlight	2015.03.27	APPROVED BY:	UNIT: mm	DESCRIPTION: TFT MODULE
01	First issue	2014.11.26			
VER.	REVISED DESCRIPTION	DATE	VERSION NO: 04		